



OPTICS SINCE 1956

LIFETIME WARRANTY



Welcome to Nikko Stirling Optics since 1956

In 1956 Malcolm Fuller started to create Japanese made high-precision optics perfectly suited for hunters and marksmen worldwide.

State-of-art optical designs, high-grade lenses, high-performance coatings and some of the industries tightest tolerances and quality assurance processes are the basis for this achievement.

This legacy is carried on from generation to generation across the world.

Thank you for being part of this success story.

Please enjoy browsing through our new catalogue.

For additional information visit our website

www.nikkostirling.com

LIFETIME WARRANTY

CONTENTS

OCTA	
30MM 8x ZOOM	4
METOR	
30MM TOP RESOLUTION	5
BOAR EATER	
30MM FOV EXTREME	6
HORNET ED	
30MM HIGH POWER	7
ULTIMAX	
30MM FIBER OPTIC	8
DIAMOND	
30MM HUNTING	9
30MM LONG RANGE	10
30MM SPORTSMAN	11
DIAMOND FFP	
30MM FIRST FOCAL PLANE	12
PANAMAX	
1 INCH	13
1 INCH LONG RANGE	14
PRECISION	15
AIRKING	
1 INCH	16
MOUNTMASTER AO	
1 INCH	17

MOUNTMASTER	
1 INCH	18
SILVER CROWN	
1 INCH	19
REFLEX SIGHTS	
PRO T5	20
PRO T4	21
XT4	22
MRSL	23
FLASH 1x25	24
NRD SPEED SIGHTS	25
NS SIGHTS	26
MOUNTS	
STEEL LOK 2 PIECE BASES	27
HOWA AND REMINGTON RAILS	27
AIRKING AND STANDARD MOUNTS	28
ZERO LOK	28
STEEL LOK QR RINGS	29
STEEL LOK RINGS	29
WRAP RING MOUNTS	30
MOUNTMASTER AO MATCH MOUNTS	30
ACCESSORIES	31
LASER RANGE FINDERS	31
LIFETIME WARRANTY	33
ANNEXURE	35

OCTA

30MM 8X ZOOM




3-24x56
NSOC32456

The Octa is available in three magnifications. All Octa use a side focus on the saddle except the 1-8x24. A daylight bright and efficient illumination supports successful shooting. Precise etched 4 Dot reticle are used for the whole line. Excellent FOV (field of view) helps fast target acquisition and overview before and after the shoot. It is a modern designed 8x zoom range for the avid hunter.

8x Zoom – cross over for close and long distance shoots. An advanced zoom range for excellent scopes. Top FOV and highest resolution for best images. Designed for successful hunting.

- 8X ZOOM
- 30MM
- ILLUMINATED
- WATER PROOF
- SHOCK PROOF
- MULTICOATED LENSES



FEATURES

- 8x Zoom
- 30mm
- ¼ inch / MOA increments (7mm@100m)
- Hunting turrets
- Parallax adjustment on 2-16x50, 3-24x56
- Illumination
- 4 Dot - glass reticle
- Fully multicoated lenses
- High end mechanics and performance

OCTA



1-8x24
NSOC1824



2-16x50
NSOC21650



3-24x56
NSOC32456

METOR

30MM TOP RESOLUTION



4-16x50
NSMEG41650


Metor offers brilliant images with high-end resolution and perfect edge-to-edge clarity. Excellent field of view (FOV) across the series allows quick target acquisition and provides best overview at any time.

Fine-tuned illumination unit from high to low. This supports the hunter and shooter to avoid blinding by illumination during low light conditions.

Upgraded fine optical adjustment and tuning allows to drop the parallax adjustment on top magnification model.

Slim - Fast - Precise.

Metor is a perfect choice for ambitious hunters and shooters.



FEATURES

- Glass reticle
- ¼ inch/MOA click (7mm@100m)
- Fully multicoated lenses
- 4 Dot
- Hunting turrets
- Fine-tuned illumination
- 30mm
- Perfect edge to edge clarity
- Best optical and mechanical performance

METOR



1-4x24
NSMEG1424



4-16x50
NSMEG41650



3-12x56
NSMEG31256



2.5-10x50
NSMEG251050

BOAR EATER

30MM FOV EXTREME




1-6x24
NSBE1624

Together with the professional designed reticle 4 Dot Extreme and daylight bright illumination these scopes are a perfect match for driven hunts and stalking in dense forests or bush land.

Well performing for dynamic shooting competitions and use for fast shoots on close range. Like 3 gun competitions, black gun shooters or similar.

Built for use on center fire and shotgun.

The specialized Boar Eater series supports hunters and marksmen for quick acquisition on moving targets with an extreme wide FOV (field of view).
The 1-4x24 offers unbeatable 48m@100m (144 feet@100yds) and the 1-6x24 remarkable 39 m@100m (117ft@100yds).



FEATURES

- 39 m@100m (117ft@100yds)
- Driven hunt designed reticle
- Hunting turrets
- 4 Dot extreme - glass reticle
- ½ inch/MOA click (15mm@100m)
- Illuminated
- 30mm
- Fully multicoated lenses
- High grade mechanics and performance

BOAR EATER



1-4x24
NSBE1424



1-6x24
NSBE1624

HORNET ED

30MM HIGH POWER



10-50x60
NSNC105060HMDIR

ED glass - Extra low dispersion.

This high-end glass offers unmatched optical performance and crisp images up to the top 50x magnification. The Hornet ED 10-50x60 supports a precise parallax adjustment on the saddle.

All technical details and features are built for successful long range center fire shooting and advanced use for FT airgun shooter or similar.


The Hornet ED 10-50x60 comes fully equipped with aluminum flip up lens covers on objective and ocular, sunshade and a detachable 100mm side wheel.

Fine adjustable parallax adjustment starts at 10yds to infinity and a stepless adjustable illumination allows precise settings for all needs.

To increase precision and to fit increments with the MIL based HMD-T reticle the Hornet 10-50x60 offers 5mm (1/20 MIL) increments. The reticle is set at 25x. For easy calculation at magnification 50x.

Top mechanics allow perfect adjustments and the turrets can be set to Zero after your adjustments.

Precision for FT competitions and long range center fire enthusiasts.



Subtensions of HMD-T reticle see page 30.

FEATURES

- ED glass – Extra Low Dispersion
- High-end optical system
- Precise Target turrets
- 1/20 MIL Click (5mm@100m) reticle
- 30mm main tube
- Parallax adjustment - 10yds to infinity
- HMD-T reticle, based on MIL standard
- Sunshade
- Illumination-unit on ocular
- Extra side wheel (100mm)
- Fully multicoated lenses
- Fast focus on ocular
- Metal flip-up lens covers on objective and ocular

HORNET ED



10-50x60
NSNC105060HMDIR



10-50x60
NSNC105060HMDIR

ULTIMAX

30MM FIBER OPTIC




2.5-10x50
UL21050

The Ultimax series is developed for hunters which are looking for the top end at reasonable costs. This 30mm scope series is developed and made in Japan. Best glass, optimised coatings and optical performance combined with production to the tightest of tolerances in our industry delivers a premium product with a crisp clear image.

Precise small fiber illuminated centre dots supports accurate shooting. The outstanding field of view (FOV) of 40m@100m on the driven hunt model allows quick and save shots on close distances. All features 30mm maintubes and bell diameters up to 56mm covers the need for hunts in bad light conditions or during night.

FIBER OPTIC ILLUMINATION SYSTEM

This new technology is an important improvement of the common illumination systems, used for all Ultimax scopes. It offers an extremely bright and precisely illuminated sharp red dot at the same time. Even in brightest conditions such as snow, sun or sand, your Ultimax scope supports your hunt with a perfect illuminated precise red dot. Of course lowest settings of this illumination are optimised and field tested for lowest light conditions. This helps your shooting and is a major difference to common illuminated reticles.



FEATURES

- Made in Japan
- Precise small centre dot for accurate shooting
- Fiber illumination technology for brightest and crisp dot
- 4A illuminated reticles
- ¼ MOA (7mm@100m) clicks
- Matte black finishing
- 30mm maintubes

ULTIMAX



1-6X24
UL1624



2.5-10x50
UL21050



3-12x56
UL31256

DIAMOND
30MM HUNTING



2.5-10x50
NDSI251050


The quest for the trophy or the exclusive game animal takes today's hunters to more extreme locations where the climate and terrain pushes the hunters and their equipment to the limit.

Faster shooting in low light – the Diamond 30mm Illuminated reticle models are designed for fast shooting in low light conditions. Here the hunter needs to quickly take a shot at game in dawn, twilight or forest conditions. The clearly defined red or green illuminated reticle makes this easy. Ideal for driven game hunting!

ETE Microlux optical coatings are added to the lenses to reduce the reflection of light by the lens surfaces, ensuring a brighter scope in low light conditions when target acquisition is critical.

Available in 30mm illuminated versions with objective diameters starting from 24mm up to exclusive 62mm.

- 30MM
- ILLUMINATED
- WATER PROOF
- SHOCK PROOF
- NITROGEN FILLED
- MULTICOATED LENSES



FEATURES

- CNC machined parts made to tightest tolerances
- Aircraft approved aluminium
- Speed focused eyepiece
- Up to 62mm objective
- Low profile adjustments
- Fast finger adjustable dials
- High Grade Optical lens coatings for maximum light transmission
- Rubber enhanced zoom ring
- Dual colour red/green illumination
- Illuminated colour glass etched No. 4 reticles

DIAMOND HUNTING



1-4x24
NDSI1424



3-12x62
NDSI31262



1.5-6x42
NDSI15644




3-12x56
NDSI31256

OTHER MODELS INCLUDE:

30MM HUNTING: 3-9x42, 2.5-10x50, 3-12x56, 3-12x42

DIAMOND

30MM LONG RANGE

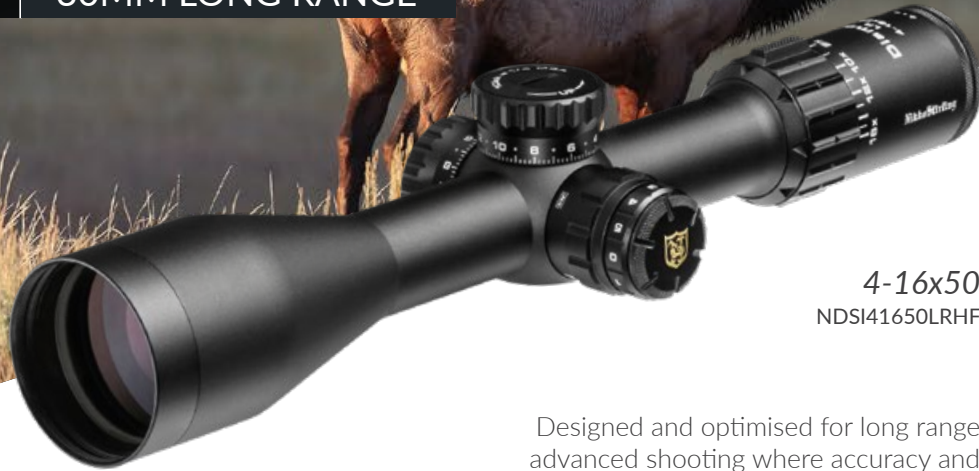

4-16x50
NDSI41650LRHF

Designed and optimised for long range advanced shooting where accuracy and consistency is critical. Recent improvements in bullet technologies and calibres combined with advancements in rifle precision and accuracy have resulted in the need for a scope that matches these developments.




The Diamond LR (Long Range), available in a 4-16x50, 6-24x50 and 10-40x56 is the perfect fit.

Using premium grade lenses featuring the latest in optical coatings combined with a 30mm aircraft grade aluminium tube ensure maximum light transmission and clarity.

Interchangeable ballistic turrets with RTZ® (Return to Zero) can be customise for specific calibers and precise ¼" MOA increments ensure every shot is on target

First time - every time!

For an explanation of the Hold Fast Reticle and Ballistic Drop Turrets with RTZ®, please see annexure.

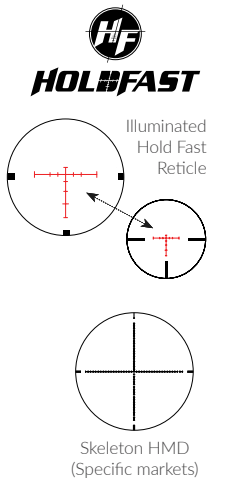

FEATURES

- 30mm aircraft-grade aluminium, one-piece main tube
- Glass-etched HOLDFAST reticle
- Fully multi-coated lens
- Microlux ETE GEN III glass coatings
- ¼ MOA turret adjustments
- 4" of eye relief
- Side Parallax Adjustable from 10 Yards to ∞
- Nikko Stirlings' RTZ® (Return to Zero) elevation turret for quick shooting
- Supplied with 2 ballistic drop turrets
- Optional side-wheel available
- Sunshade included
- Dual-colour red/green illumination settings

DIAMOND LONG RANGE



4-16x50
NDSI41650LRHF



6-24x50
NDSI62450LRHF



10-40x56
NDSI104056LRHMD



Extra blank Ballistic Drop Turret for our customized markings

DIAMOND

30MM SPORTSMAN



10-50x60
NSN105060MD


This high precision scope with a 30mm maintube is made in Japan and a preferred choice for professional air rifle competition shooters worldwide. USFT and World FT PCP championships were won with the Diamond Sportsman rifle scope.



Multi-coated lenses and a new optics calculation enhance the light transmission and offer a crisp image for best shooting results. The saddle focus is state of the art today and the Diamond Sportsman features a detachable 100mm side wheel providing the user with precise focus and parallax correction.

The Diamond Sportsman is available with illuminated or non illuminated Mil Dot reticle and non-illuminated NATO reticle.

The target turrets with 1/8 MOA increments feature a return to zero ability. Top competitors worldwide rate this scope over and above most other maker.

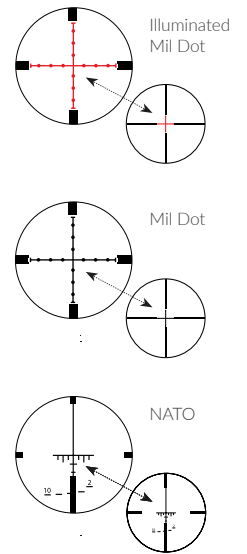

FEATURES

- Developed and made in Japan
- Target turrets
- 1/8 MOA (3.5mm at 100m) adjustable turrets
- Detachable wheel
- Large side wheel for accurate focussing and range finding
- Optimised coating for clarity and contrast
- Return to zero turrets with covers
- 30mm maintube
- High grade anodized aluminium
- Glass etched reticle
- Nato or Mil Dot reticle

DIAMOND SPORTSMAN



10-50x60
NSN105060MD



10-50x60
NSN105060NATO



10-50x60
NSN105060MDIR



Side wheel

DIAMOND FFP

30+34MM FIRST FOCAL PLANE



4-16x44
NSFFP3441644


The Diamond FFP offers first focal plane technology. It is built for fans and users of MIL related reticles for specific shooting needs.



30mm and 34mm main tubes for massive more elevation.

On top of our professional skeleton HMD (Half Mil Dot) reticle we add the new MIL based PRR (Precision Rifle Reticle) for long range enthusiasts. Image and reticle increase/decrease always in same proportion. Allows fast and easy drop compensation and range finding.


Rugged built, up to date design and knurlings which fit for handling with gloves offers secure and easy use in the field. The Diamond FFP is made of a solid one piece grade aluminium maintube with fully multi-coated lenses and a red index mark on the magnification ring.



PRR

Subtensions of skeleton HMD and PRR reticle find on page 32.

SUBTENSIONS: SKELETON HMD (HALF MIL DOT)

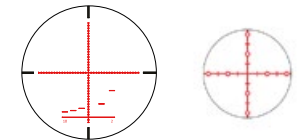

FEATURES

- Precise lockable target turrets
- Click 1/10 MIL (10mm@100m)
- Parallax adjustment on the saddle 10yds to infinity
- Illuminated / non illuminated versions
- 30mm + 34mm main tubes
- Fully multicoated lenses
- Glass edged reticles
- PRR (Precision Rifle Reticle)
- Skeleton HMD (Half Mil Dot)

DIAMOND FFP 30 + 34MM



6-24x50
NSFFP3462450



4-16x44
NSFFP41644

OTHER MODELS INCLUDE:

34MM:4-16x44, 6-24x50

PANAMAX

1 INCH




3-9x40AOIR
NPGI3940AO

This series is packed with features. The Panamax series have been designed around an extremely wide angle field of view which is approx 20% more than the average comparable 1" scopes on the market today.

Continuing with our proven hard anodized high grade aluminium main tubes the new design is not only visually appealing but also durable to handle heavy recoil rifles. Available as well with parallax adjustment on bell (AO) and illuminated reticle (IR).

The illuminated models feature a red and green illuminated Half Mil Dot reticle and make it a top performer from Dawn-till-Dusk. This scope is sure to be a hit with hunters and recreational shooters everywhere.

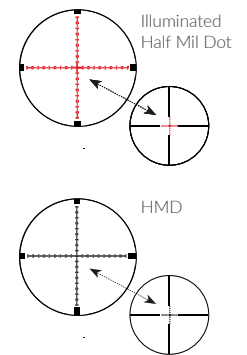

- WATER PROOF
- SHOCK PROOF
- NITROGEN FILLED
- MULTICOATED LENSES
- AVAILABLE ILLUMINATED

FEATURES

- Nikko Stirling Panamax® Wide Angle Lens
- Extreme Field of View – approx 20% more than std 1" scope
- ¼ MOA Increments (7mm@100m)
- Centerfire, rimfire and airgun rated
- Parallax adjustable objective from 10 yards up to infinity
- Dual colour red/green illumination
- 1" Maintube
- Half Mil Dot reticle
- Glass etched reticles
- Fast eye focus
- Design owned by Nikko Stirling

1 INCH PANAMAX



3-9x40
NPW3940



3-9x50 AO
NPW3950AO



4.5-14x50 AO IR
NPGI451450AO



4-12x50AO
NPW41250AO

OTHER MODELS INCLUDE:

- PANAMAX: 3-9x40, 3-9x50
- PANAMAX AO: 3-9x40AO, 3-9x50AO, 4-12x50AO, 4.5-14x50AO
- PANAMAX ILLUMINATED: 3-9x40IR, 3-9x50IR
- PANAMAX AO ILLUMINATED: 3-9x40AOIR, 3-9x50AOIR, 4-12x50AOIR, 4.5-14x50AOIR



PANAMAX
1 INCH LONG RANGE




8-24x50 AO IR
NPGI82450AO

Continuing on from the popular Panamax range, the new Long Range series has been developed for shooting over long distances with precise clarity and accuracy.

Continuing with our proven hard anodized high grade aluminium main tubes the new design is not only visually appealing but also durable to handle heavy recoil rifles.
This series feature a parallax adjustment on bell (AO) and a red and green illuminated Half Mil Dot reticles.
This makes Panamax Long Range series as well to a top performer from Dawn-till-Dusk.

- ILLUMINATED
- WATER PROOF
- SHOCK PROOF
- NITROGEN FILLED
- MULTICOATED LENSES



FEATURES

- Nikko Stirling Panamax® Wide Angle Lens
- Extreme Field of View – approx 20% more than std 1" scope
- ¼ MOA Increments (7mm@100m)
- Centerfire, rimfire and airgun rated
- Parallax adjustable objective from 10 yards up to infinity
- Dual colour red/green illumination
- 1" Maintube
- Half Mil Dot reticle
- Glass etched reticles
- Fast eye focus
- Design owned by Nikko Stirling

PANAMAX 1INCH LONG RANGE ILLUMINATED



6-18x50 AO IR
NPGI61850AO



8-24x50 AO IR
NPGI82450AO

PANAMAX PRECISION




NPP41240

The Panamax Precision is a compact riflescope with multiple ballistic turrets for easy drop compensation. On top it features a HMD reticle (Half Mil Dot).

To match the HMD reticle it uses 1/10 MIL click.
It includes 6 different calibrated turrets for popular rimfire loads. One with a blank section to mark your customized drop.
Different other drop turrets will be added in future.
Extrem wide FOV and excellent coatings offers a crisp clear optic.
Developed for centerfire, rimfire and airgun.



- BALLISTIC
TURRETS
- WATER
PROOF
- SHOCK
PROOF
- NITROGEN
FILLED
- MULTICOATED
LENSES



FEATURES

- Nikko Stirling Panamax® Wide Angle Lens
- Extreme Field of View – 20% more than std 1" scope
- Rimfire , centerfire and airgun rated
- HMD - Reticle (Half Mil Dot)
- 1" Main tube
- 6 Ballistic Turrets supplied
- .17 HMR / 17gr / 2250 fps
- .22 Subsonic / 40gr 1085 fps
- .22 High Velocity / 40gr 1300 fps
- .22 Extreme Velocity / 33gr 1500 fps
- .22 Mag. / 40gr /1910 fps
- Blank Turret for customised drops
- 1/10 MIL click (10mm@100m)
- Fast eye focus
- Design by Nikko Stirling

PANAMAX PRECISION



Turrets



4-12x40
NPP41240

AIRKING


1 INCH



4-12X42
NGRA41242

Across the range all models feature a parallax adjustment on the bell (AO) starting from 10 yds to infinity.

All are supplied with a strong 3/8" one piece base mount with recoil stop bolt, and available in standard HMD reticle or illuminated red/green HMD reticle.

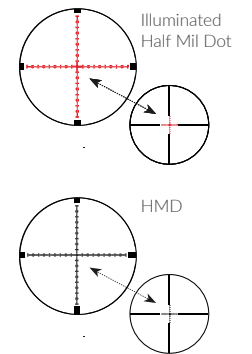

The Airing range has been designed especially for all types of airguns. Manufactured to withstand the heavy impact that many high power spring airguns give, the Airing range will ensure shot after shot consistency.

- WATER PROOF
- SHOCK PROOF
- NITROGEN FILLED
- MULTICOATED LENSES
- AVAILABLE ILLUMINATED

FEATURES

- Supplied with 1 inch 3/8 one piece base mount
- 1 inch matte black alloy body tube
- AO models feature parallax adjustment on bell
- HMD reticles
- Multi-coated lenses
- Waterproof, fogproof, shockproof
- Nitrogen filled
- 1/4 MOA adjustments (7mm@100m)
- 1/8 MOA adjustments 4,5-14x50
- Fast eyefocus
- Available with dual colour red/green illumination

AIRKING



3-9x42
NGRA3942



2-7x32
NGRA2732

AIRKING ILLUMINATED



4x32 IR
NGRAI432



4,5-14x50 IR
NGRAI451450

OTHER MODELS INCLUDE:

AIRKING:4x32, 2-7x32, 3-9x42, 4-12x42, 4,5-14x50
AIRKING ILLUMINATED: 4x32IR, 2-7x32IR, 3-9x42IR, 4-12x42IR, 4,5-14x50IR



MOUNTMASTER AO

1 INCH




3-9x40 AO
NMM3940AO

The MountMaster AO series has been developed for all types of shooting. All models feature an Adjustable Objective (AO) which ranges from 10 yards to infinity. Using superior optical coatings and easy to use features, the MountMaster AO series will suit just about any shooting application you need without breaking the bank.

All our tried and proven Mountmaster scope series are competitively priced and are rugged enough to stand up to whatever you throw at them.

Featuring 1/4" finger adjustable turrets and accurate double screw 3/8" match mounts as well as fully adjustable parallax on the bell (AO) and available with or without illuminated reticle (IR).

All Mountmaster scopes feature fully multi-coated lenses, are shock tested and dry-nitrogen purged at the factory to make them fully water and fog proof for guaranteed performance, whether you are on a hunt or at the range.

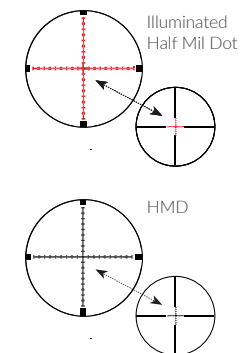

- WATER PROOF
- SHOCK PROOF
- NITROGEN FILLED
- MULTICOATED LENSES
- ADJUSTABLE OBJECTIVE

FEATURES

- Supplied with 3/8" Double Screw Match Mounts
- 1 Inch Matte Black alloy body
- All models Parallax from 10 yards to infinity
- Dual colour red/green illuminated models available
- HMD Half Mil Dot Reticle
- Multi-coated lenses
- Waterproof, fogproof & shockproof
- Nitrogen Filled
- 1/4 MOA adjustments (7mm@100m)
- Fast eye focus

MOUNTMASTER AO



4x32 AO
NMMI432AO



3-9x50 AO
NMMI3950AO



3-9x40 AOIR
NMMI3940AOIR



4-12x50AOIR
NMMI41250AOIR

OTHER MODELS INCLUDE:

MOUNTMASTER AO: 4x32, 4x40AO, 6x40AO, 3-9x40AO, 3-9x50AO, 4-12x50AO, 4-16x50AO
MOUNTMASTER AO ILLUMINATED: 4x32AOIR, 3-9x40AOIR, 3-9x50AOIR, 4-12x50AOIR, 4-16x50AOIR

MOUNTMASTER

1 INCH




6x40
NMC640

The MountMaster series have been designed and developed for those wanting an easy to use scope that is not only strong but reliable and clear. Featuring 3/8" Mounts as standard with easy to use adjustments, the Mountmaster series fits just about any discipline you require.

The popular Mountmaster series is based on the tough Silver Crown but is supplied with a set of 3/8" Mounts as standard.

All models are supplied with dust covers and feature 1/4" adjustable turrets with fully multi-coated lenses, are shock tested and dry-nitrogen purged at the factory to make them fully water and fog proof for guaranteed performance, whether you are on a hunt or at the range.

- WATER PROOF
- SHOCK PROOF
- NITROGEN FILLED
- MULTICOATED LENSES



FEATURES

- Supplied with 3/8" Mounts
- 1 Inch Matte Black alloy body
- HMD Half Mil Dot Reticle
- Multi-coated lenses
- Waterproof, fogproof & shockproof
- Nitrogen Filled
- 1/4 MOA adjustments (7mm@100m)

MOUNTMASTER



3-9x40
NMC3940



4x40
NMC440



4-12x40
NMC41240

OTHER MODELS INCLUDE:

MOUNTMASTER:4x20, 3-7x20, 4x32, 4x40, 6x40, 3-9x40, 4-12x40, 4-12x50



SILVER CROWN

1 INCH


6x40
NSC640

All Silver Crown scopes feature fully multi-coated lenses, shock tested and dry-nitrogen purged at the factory to make them fully water and fog proof for guaranteed performance, whether you are on a hunt or at the range.

The Silver Crown will remain accurate shot after shot.

The Silver Crown series features a 1" maintube and has been developed for airgun and rimfire use.

- WATER
PROOF
- SHOCK
PROOF
- NITROGEN
FILLED
- MULTICOATED
LENSES



FEATURES

- 1 inch matte black alloy body tube
- Waterproof, fogproof, shockproof
- 1/4 MOA adjustments (7mm@100m)
- HMD reticles
- Nitrogen filled
- Fast eyefocus
- Multi-coated lenses

SILVER CROWN



4x32
NSC432



4x40
NSC440



3-9x40
NSC3940



4-12x40
NSC41240

OTHER MODELS INCLUDE:

SILVER CROWN: 6x40



REFLEX SIGHTS

PRO T5 LARGE LENS



NDHOLOT5

Fast and precise.
Rifle - AR - Shotgun - Pistol

Made in Japan – world leading red dot sight technology. The PRO T5 uses an enlarged lens for fastest target acquisition and SmartDot Activation.

It combines top military standard coatings to maximize the intensity of the red dot by offering brightest image.

This supports successful shooting in forests or during bad light conditions on shooting ranges. Optimized push buttons allow best handling of the illumination.


The battery is located in a tray on the side which allows easy change without dismounting.

SmartDot Activation - automatic turn off after 3 minutes in rest position and automatic on to last setting if moved. Shut off after 4 hours inactivity.

Picatinny mount and a slim adaptor plate for Doctor based mounting systems are available.

Rifle - AR - Shotgun - Pistol

- MADE IN JAPAN
- LARGE LENS
- ILLUMINATED
- PULSE TECHNOLOGY
- WATER PROOF
- SHOCK PROOF
- MULTICOATED LENSES



FEATURES

- Made in Japan
- Parallax free
- Waterproof - shockproof
- Extreme bright illumination
- SmartDot Activation
- Push buttons up/down for illumination setting
- 10 illumination settings
- Automatic shut off after 4 hours
- Lightweight - 41 grams incl. battery
- Optimized coatings
- Window size 26x22mm
- Small outer dimensions 56x29x32mm
- 1 MOA clicks
- 4 MOA red dot
- Pulse electronics for long battery runtime
- Easy battery change – tray on the side of sight
- Memory function – automatic shut off after 4 hours
- Huge elevation range - 105" @ 100yds (290cm @ 100m)

PRO T5



NDHOLOT5



NDHOLOT5

REFLEX SIGHTS

PRO T4



NDHOLOT4

The ProT4 is using renowned Japanese optical technology and craftsmanship. It is made of high grade alloy, providing superior strength, combined with robust and advanced optical features.

The advanced red dot speed sight the ProT4 is made in Japan. It is parallax free, waterproof and has a click adjustment with locking feature.


The battery is located in a tray on the side which allows easy change without dismounting. It features an advanced illumination system and offers extreme brightness of the 4 MOA dot. At the same time the new pulse electronics extend the run-time of batteries.

New push button technology allows easy adjustment of illumination.

SmartDot Activation - automatic turn off after 3 minutes in rest position and automatic on to last setting if moved. Shut off after 4 hours inactivity.

Optimal coatings and size of the glass lens offers a perfect image. Optional Weaver and other mounts are available. As well a slim adaptor plate to fit onto Doctor based mounting systems. A great sight for quick shots for hunting or on the shooting range. For rifles and handguns.

- MADE IN JAPAN
- ILLUMINATED
- PULSE TECHNOLOGY
- WATER PROOF
- SHOCK PROOF
- MULTICOATED LENSES



FEATURES

- Made in Japan
- Parallax free
- Waterproof - shockproof
- Push buttons up/down for illumination setting
- 10 illumination settings
- SmartDot Activation
- Lightweight - 40 grams
- Optimised coatings
- Small outer dimensions 51x28x33mm
- Click adjustments with locking feature
- Extreme bright illumination
- 4 MOA red dot
- Memory function - auto shut off after 4 hours
- Easy battery change - tray on the side of sight
- Huge elevation range - 130°@100yds (365cm@100m)

PRO T4



NDHOLOT4



NDHOLOT4

REFLEX SIGHTS

XT4



NDSPXT4

The advanced, lightweight and brand new red dot speed sight XT 4 is made in Japan. It is the smaller brother of the ProT4. The XT4 is using renowned Japanese optical technology and craftsmanship.

It is made of high grade alloy, providing superior strength, robust and advanced optical features. It is parallax free, waterproof and has a click adjustment with locking feature.

The battery is located in a tray on the side which allows easy change without dismounting. It features an advanced illumination system and offers extreme brightness of the 4 MOA dot. At the same time the new pulse electronics extend the run-time of batteries.

New push button technology allows easy adjustment of illumination.

SmartDot Activation - automatic turn off after 3 minutes in rest position and automatic on to last setting if moved. Shut off after 4 hours inactivity.

Optimal coatings and size of the glass lens offers a perfect image. Optional Weaver and other mounts are available. As well a slim adaptor plate to fit onto Doctor based mounting systems. A great sight for quick shots for hunting or on the shooting range. For rifles and handguns.



FEATURES

- Made in Japan
- Parallax free
- Waterproof - shockproof
- Push buttons up/down for illumination setting
- 10 illumination settings
- SmartDot Activation
- Lightweight - 35 grams
- Optimised coatings
- Small outer dimensions 46x27x27mm
- Click adjustments with locking feature
- Extreme bright illumination
- Pulse electronics for longer battery runtime
- Easy battery change – tray on the side of sight
- Huge elevation range - more than 180" @ 100yds (450cm @ 100m)
- 4 MOA red dot

XT4



NDSPXT4



NDSPXT4

REFLEX SIGHTS

MRSL




NDSMRSL

This 1x magnifying mini red dot sight is made in Japan. It is a closed tube system with an integrated weaver mount.

The MRSL sight is using renowned Japanese optical technology and craftsmanship. It is made of high grade alloy, providing superior strength and is rugged built.

This sight is parallax free, waterproof and has click adjustments. The red dot is perfect sized with 3,5 MOA. Optimal coatings offers a perfect image. A great sight for quick shots for hunting or on shooting range.

- MADE IN JAPAN
- ILLUMINATED
- PULSE TECHNOLOGY
- WATER PROOF
- SHOCK PROOF
- MULTICOATED LENSES



FEATURES

- Made in Japan
- Parallax free
- Waterproof - shockproof
- 1x magnification
- Integrated weaver mount
- Optimised coatings
- 1/2 MOA Click adjustments
- Bright illumination - 11 settings
- 3,5 MOA red dot
- Easy battery change – battery located in illum. Turret

MRSL



NDSMRSL



NDSMRSL



REFLEX SIGHTS

FLASH 1X25



NRD25H


As all Nikko optics it is shockproofed and nitrogen filled. An integrated 5/8" mount supports easy and reliable mounting to standard Picatinny/Weaver rails.

It comes with an extra high rise mount for black guns.

Made for rifle, shot - and handguns.

The FLASH 1x25 is a compact red dot sight and offers unlimited eye relief with a daylight bright illuminated 3 MOA dot.

- ILLUMINATED
- WATER PROOF
- SHOCK PROOF
- NITROGEN FILLED
- MULTICOATED LENSES



FEATURES

- Centerfire, shot-, hand- and airgun
- Aircraft grade aluminum tube
- Integrated Picatinny mount
- Extra High Rise Picatinny mount included
- Extrem bright red illumination
- 11 settings
- 3 MOA dot
- Fully multicoated lenses
- Water-/Dust/Shock proofed
- CR 2031 battery

FLASH 1x25



NRD25H



REFLEX SIGHTS

NRD SPEED SIGHTS



40IM
NRD40IM


Reflex shooting is a demanding discipline, as the target needs to be acquired quickly in the sights. Accurate sighting without parallax or eye relief limitations are also vital to achieving that top score or hunting success.

Whether you are a hunter, recreational shooter or competitive marksman, the range of RED DOT reflex sights offers a great choice for you.

All of them offer a 1x magnification. Starting with the NRD25, a low profile 25 mm objective sight through to the 50mm objective lens NRD50.

All Nikko Stirling red dot sights are suitable for use on high-powered rifles, shotguns and handguns.

- ILLUMINATED
- WATER PROOF
- SHOCK PROOF
- NITROGEN FILLED
- MULTICOATED LENSES



FEATURES

- Parallax free unlimited eye relief
- Versatile for low light and poor contrast environment
- Clear and bright dot
- Compact design and light weight
- Rugged construction
- 12 position dot intensity adjustment
- Precision click adjustments for windage and elevation
- Multi-coated lenses
- Shockproof, waterproof and fog proof
- Scratch-resistant anodizing available in black matte
- Mounts for 3/8" (most air rifles and .22s) and 5/8" weaver style mounting systems
- Centerfire – rimfire – shotgun – hand gun rated

REFLEX SIGHTS



2538
NRD2538



30IM
NRD30IM



50IM
NRD50IM



12233
NRD2233

OTHER MODELS INCLUDE:

NRD: 25, 2538, 30IM, 30IM38, 40IM, 40IM38, 50IM, 50IM38

REFLEX SIGHTS

NS SIGHTS




LX3
NSLX3

Reflex shooting is a demanding discipline, as the target needs to be acquired quickly in the sights. Accurate sighting without parallax or eye relief limitations are also vital to achieving that top score or hunting success.





All NS sights are rugged built and offer a scratch resistant black anodized surface together with a 3/8" integrated Weaver mount. A bright dot which is adjustable in several steps for your preferred illumination level and precise click adjustment support your shooting. Parallax free and unlimited eye relief is a feature of the whole range.

As an exception of this range the NSLX2 uses a 4x magnification with sufficient eye relief. Together with the NSLX3 it is built with a 7/8" integrated Weaver mount.



Dual colour red/green illumination LX3, LX2, NS130



Dual colour red/green illumination for NS433, NS533



FEATURES

- Parallax free and unlimited eye relief
- Compact design and light weight
- Shockproof, waterproof and fog proof
- 1x magnification on three models
- Rugged construction
- Scratch-resistant anodizing in black matte
- 4x magnification on LX2
- Dot intensity adjustment
- Integrated weaver style mounting systems
- Versatile for low light and poor contrast environment
- Precision click adjustments for windage and elevation
- Centerfire – rimfire – shotgun – hand gun rated
- Clear and bright dot
- Multi-coated lenses

NS SIGHTS



433
NS433



533
NS533




130
NS130



4x Magnification
LX2
NSLX2

MOUNTS

STEEL LOK 2 PIECE BASES

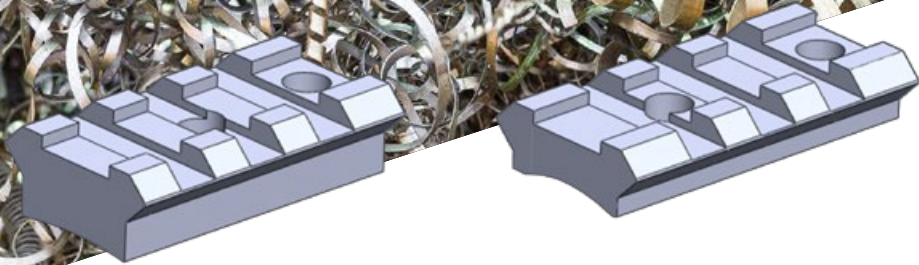

2 Piece Steel Bases
NMREM101

STEEL - LOK™

Made from solid steel. The STEEL-LOK 2 Piece Bases suit the Howa 1500, Remington 900 and Weatherby Vanguard. The 2 Piece Bases provide a Weaver/ Picatinny design and suit all action lengths. The high strength Torx screws ensure a strong and precise fit to the action and offers a strong connection between rails and rings.

FEATURES

- Two Piece Steel Bases
- Suits Howa 1500, Remington 700 & Weatherby Vanguard
- Suits all action lengths
- Designed to be used with STEEL-LOK Quick Detachable Steel Rings Matte Black
- High strength Torx screws
- Precise and Reliable
- Field Tested Design
- Machined from Solid Steel
- Weaver / Picatinny design

MOUNTS

HOWA AND REMINGTON RAILS



One Piece Picatinny base suit short action HOWA Stainless finish
NM15501

Professional made rails and rings for your needs. Designed to delivery accuracy and easy fit.



FEATURES

- One piece Picatinny rails
- Black matte finishing
- Stainless finishing

OTHER MODELS INCLUDE:

ONE PIECE PICATINNY BASE SUIT SHORT ACTION HOWA BLUED FINISH:NM15500
ONE PIECE PICATINNY BASE SUIT LONG ACTION HOWA BLUED FINISH:NM15502
ONE PIECE PICATINNY BASE SUIT LONG ACTION HOWA STAINLESS FINISH:NM15503

MOUNTS

AIRKING AND STANDARD MOUNTS



*One Piece Air King 3/8" mounts
with Recoil Stop Medium*
NMC38ONE



Our tried and proved accurate and reliable Airking mounts are made for rimfire, centerfire and air rifles.

FEATURES

- Black matte
- Available for 1" and 30mm tube diameter
- Dovetail 3/8 mounts
- One piece base for additional strength (Airking mounts only)
- Recoil stop (Airking mounts only)

OTHER MODELS INCLUDE:

TWO PIECE 3/8" MOUNTS: NMC38
 ONE PIECE AIR KING 3/8 " MOUNTS WITH RECOIL STOP: NMC38ONEH
 ONE PIECE AIR KING 3/8 " MOUNTS WITH RECOIL STOP 30MM: NMC38ONE30, NMC38ONE30H

MOUNTS

ZERO LOK



ZERO LOK MOUNTS
NSTR1M

ZERO - LOK

The ZERO-LOK MOUNTS go straight onto action and eliminate any play between action and scope.

Easy to mount and lightweight made of high grade aluminum.

Fits all Howa 1500, Inter-Arms M1500, Weatherby Vanguard and all same profiles.

Available for 1 inch and 30mm tubes in 3 different heights (low/med/high).

FEATURES

- Goes straight onto action
- Eliminates chance of loose connection
- Unique design prevents shifting of zero
- Durable and lightweight
- High grade aluminum
- CNC machined
- Matte black finish
- Fits all Howa 1500, Inter-Arms M1500,
- Weatherby Vanguard and all same profiles
- 1 inch and 30mm available in low/med/high

OTHER MODELS INCLUDE:

30MM ZERO LOK MOUNTS: NSTR30L, NSTR30M, NSTR30H
 1 INCH ZERO LOK MOUNTS: NSTR1L, NSTR1M, NSTR1H

MOUNTS

STEEL LOK QR RINGS



30mm, weaver steel mount, Low
NSMQR30WL

STEEL - LOK™ QR 1" / 30mm / 34mm

The STEEL-LOK Quick Release Steel Rings are available for 34mm, 30mm and 1" scope diameter in three different heights and fit for Weaver/ Picatinny. The strong steel construction and field tested design provides precise fitting and re-fitting. Made from solid steel.

FEATURES

- 34mm / 30mm / 1"
- Weaver / Picatinny Design
- Field Tested Design
- Matte Black
- Quick Release
- Machined from Solid Steel
- Precise and Reliable
- Strong Steel Construction
- Fitted with thumb operated quick detachable levers for easy removal and precise re-fitting to original point-of-impact

OTHER MODELS INCLUDE:

30MM, WEAVER STEEL MOUNT: NSMQR30WH, NSMQR30WM, NSMQR30WL
34MM, WEAVER STEEL MOUNT: NSMQR34WH, NSMQR34WM, NSMQR34WL
1 INCH, WEAVER STEEL MOUNT: NSMQR1WH, NSMQR1WM, NSMQR1WL

MOUNTS

STEEL LOK RINGS



STEEL LOK RINGS
NSM1WH

STEEL - LOK™

The STEEL-LOK Steel Rings are available for scope diameter 30mm and 1" in three different heights. They fit all standard Weaver/ Picatinny rails. The strong steel construction and tested design provides precise fitting and re-fitting. Made from solid steel.

FEATURES

- 30mm / 1"
- Weaver / Picatinny Design
- Field Tested Design
- Matte Black
- Machined from Solid Steel
- Precise and Reliable
- Strong Steel Construction
- Precise fitting

OTHER MODELS INCLUDE:

1 INCH, WEAVER STEEL MOUNT: NSM1WH, NSM1WM, NSM1WL
30MM, WEAVER STEEL MOUNT: NSM30WH, NSM30WM, NSM30WL

MOUNTS

WRAP RING MOUNTS

MOUNTS

MOUNTMASTER AO MATCH MOUNTS



*Wrap Around Design Weaver
1 inch ringset low
NM20052*



*Match 1 inch 3/8"
Dovetail Low
NSMM138L*

ALLOY

CNC
PRECISION

Our proofed and tried wrap ring mounts are accurate made of high grade aluminum. Available for 1 inch and 30mm in 3 different heights. Together with our one piece bases a perfect combo to mount your scope.

FEATURES

- Weaver wrap ring mounts
- Available for 1" and 30mm tube diameter
- 3 different heights - low/med/high
- Black matte finishing

OTHER MODELS INCLUDE:

1 INCH RINGSET: NM20054, NM20054, NM20056
30MM RINGSET: NM20062, NM20064, NM20066

Our accurate and reliable Mountmaster AO Match Mounts are made of highest grade aluminium with matte black finishing and designed for all categories of rifles.

ALLOY

CNC
PRECISION

FEATURES

- Black matte
- Available for 1" and 30mm tube diameter
- Recoil stop
- Dovetail 3/8" and Weaver mounts
- 3 different heights - low/med/high
- 4 top screws for additional strength
- 3/8" models feature double side screws

OTHER MODELS INCLUDE:

MATCH 1 INCH 3/8 DOVETAIL: NSMM138L, NSMM138M, NSMM138H
MATCH 1 INCH WEAVER STYLE: NSMM1WL, NSMM1WM, NSMM1WH
MATCH 30MM 3/8 DOVETAIL: NSMM3038L, NSMM3038M, NSMM3038H
MATCH 30MM 3/8 WEAVER: NSMM30WL, NSMM30WM, NSMM30WH

ACCESSORIES



Pre zero your scope with the Nikko Stirling scope aligner. The scope aligner saves your time and money.



SCOPE ALIGNER
NSALIGNER

FEATURES

- Rugged ABS carry case
- Small size
- 16 barrel arbores
- Suits most rifles

ALLOY

CNC PRECISION

LASER RANGE FINDERS

FEATURES

- Magnification 6x
- Accuracy: +/-1 yard
- Small size: 106*73*41 mm
- Range: 5yds - 1312yds
- Banner 300yds/Tree 765 yds/ Guideboard 1312yds
- Water and dust resistant
- Rugged housing with rubber armour
- Measuring Time: Less than 1 second
- Auto Power Off after 10 seconds
- Power: 3V Lithium CR2 battery



603
NSLRF603

DIAMOND LONG RANGE

USER MANUAL

The Diamond LR scope offers accurate ballistic drop compensation turret including **RTZ® (Return to Zero)**.

The **RTZ® (Return to Zero)** elevation turret allows you to find your closest zeroed in shooting distance just by this stop.

The elevation and windage is based on ¼ inch at 100yds click increments.

Please note: This equals very accurate to ¼ MOA or 7mm at 100m.

The scope is supplied with 2 Ballistic Drop Turrets:



1. Assembled Ballistic Drop Turret with ¼ inch indications. (equals app. ¼ MOA or app. 7mm@100m)
Full numbers indicate 1" at 100yds

2. Extra blank Ballistic Drop Turret for your customized markings of your required distances. Increments are ¼ inch at 100yds

TO ASSURE PRECISE FUNCTION:

Please take care for proper mounting and follow up. Use a high quality mount, avoid tilted positioning and adjust eye relief accordingly to guarantee best performance. Do not over tighten the mount to avoid damage on scope. For further mounting instructions please check the general Nikko Stirling manual.

HOW TO ZERO IN A BALLISTIC DROP COMPENSATION TURRET WITH RTZ® (RETURN TO ZERO)

Nikko Stirling recommends to use a professional shooting range.

1. To use the **RTZ® (Return to Zero)** unscrew the top of the elevation turret with the supplied red plastic tool or similar to avoid scratches and remove it.



2. Pull off the elevation turret gently
3. Store it on a safe place together with the top part of the elevation turret for reassembling.
4. Zero in your scope to the closest distance of your choice (eg. 100yds) by using the centre of the reticle.
5. Use the slot on top of the spindle to turn the elevation in the required direction (up/down) to zero in your closest required distance (eg. 100 yds).



Use the red plastic tool or a coin.

Increments: ¼ Inch at 100 yds (app. ¼ MOA; app. 7mm at 100m).

6. Adjust windage accordingly. Pull to unlock and push down to lock setting.

CONTINUED ON NEXT PAGE



HOLDFAST

USER MANUAL



Accurate HOLDFAST lines with reference subtensions in MOA at 100 yards set correct at 10x Magnification.

IMPORTANT

After zero in the closest distance (eg. 100yds) put the elevation turret gently back again.



Take care to match the zero on the elevation turret with the arrow mark. Close the top of the elevation turret using the red plastic tool to avoid scratches.

Now your **RTZ® (Return to Zero)** is set on the closest distance you zeroed in (eg. 100 yds).

ZERO IN THE BALLISTIC DROP COMPENSATION TURRET WITH THE ¼ INCH MARKS:

1. Zero in the distances that you require by adjusting the elevation turret.
2. As a reference use the arrow mark on the main tube.
3. Write down or remember the different settings for each distance.

ZERO IN THE BLANK BALLISTIC DROP COMPENSATION TURRET WITH CUSTOMIZED MARKS:

1. Zero in the distances you require by adjusting the elevation turret.
2. Mark the turret by yourself accordingly. (eg. 200 yds, 300 yds, 350yds, 400 yds...)
3. As reference use the arrow mark on the main tube.

HOW TO USE THE DIAMOND LR SCOPE IN THE FIELD?

Nikko Stirling recommends to test several distances on a proper shooting range to verify the correct point of impact before hunting.

Use a laser range finder to measure the distance to the target. A precise measurement is important to ensure the proper shooting results.

USING THE BALLISTIC DROP COMPENSATION TURRETS:

Pull elevation turret and adjust to required drop marking.

Now you are dead on.



Use the centre cross of the reticle and fire. If you want to lock the setting push down the elevation turret.

Good sports!

For video instructions please visit www.nikkostirling.com

PLEASE NOTE:

Parameters like barrel length, humidity, altitude, heights of mount, bullet weight, velocity, temperature etc. can lead to different point of impacts.

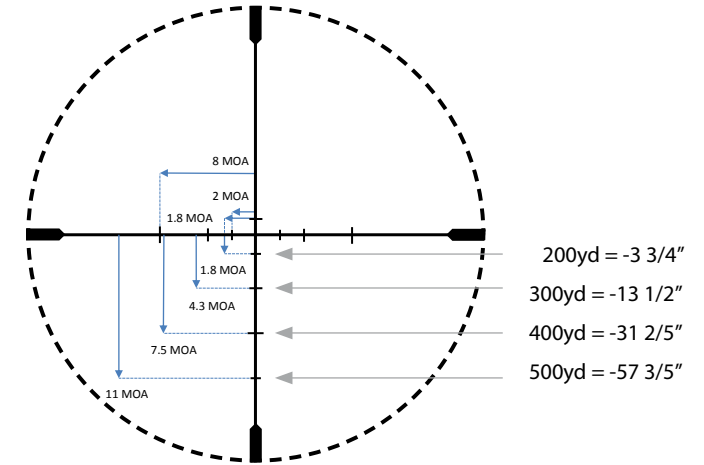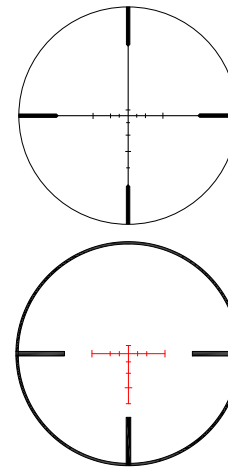

The Nikko Stirling HOLDFAST reticle has been developed to take longer distance shots quickly by using HOLDFAST lines that match the known point of impact of popular ammunition. A wide variety of ammunition can be accurately used when you adjust the image size in relation to the HOLDFAST reticle by simply adjusting the Magnification Power.

SIMPLE TO USE:

1. Select the ammunition you will use and match the trajectory to the following chart.
2. Then note Magnification.
3. Now sight in (ZERO) your rifle at the specified yardage (usually 100 yards unless indicated otherwise).
4. When hunting select the correct magnification.
5. Use a range finder to correctly range your target.
6. Fire using the holdover line that matches the distance to the target.

EXAMPLE:

When using a Federal .308 with 150 Gr bullet you would select a Magnification setting of 9. Zero at 100 yards. Fire knowing the Centre line is the 100 yard kill point, the second is the 200 yard kill point, the Third line is the 300 yard kill point, the Fourth line is the 400 yard kill point and the Fifth is the 500 yard kill point.

CONTINUED ON NEXT PAGE

Magnification 7x

		Bullet Drop Inches	FED 375 HH 300Gr Nosler 2440 FPS
Centre Line	100 yds	0"	0"
2nd Line	200 yds	5 3/8"	-5 1/2"
3rd Line	300 yds	19 2/7"	-19 1/3"
4th Line	400 yds	44 7/8"	-43 8/9"
5th Line	500 yds	82 1/4"	-80 1/2"

Magnification 8x

		Bullet Drop Inches	FED 308 180 Gr Soft pt 2570 Fps	ZERO AT 70 Yards	FED 22 LR 36 Gr HP 1260 FPS Zero at 70 yds
Centre Line	100 yds	0"	0"	70 yds	0 "
2nd Line	200 yds	4 5/7"	-5 "	100 yds	-3 1/5"
3rd Line	300 yds	16 8/9"	-17 1/3"	150 yds	-16 1/9"
4th Line	400 yds	39 1/4"	-39 2/7"	200 yds	-38 4/5"
5th Line	500 yds	72 "	-73 "	250 yds	-72 3/5"

Magnification 9x

		Bullet Drop Inches	FED 6.5x55 140Gr Soft Point 2650 fps	FED 308 150 GR Soft Point 2820 fps	FED 308 168Gr Sierra Matchking 2650 fps	ZERO AT 200 Yards	FEDERAL 22250Rem 55 gr Nosler Bal tip 3670 fps
Centre Line	100 yds	0"	0"	0"	0"	200 yds	0"
2nd Line	200 yds	4 1/5"	-4 2/7"	-3 8/9"	-4 2/7"	300 yds	-5 "
3rd Line	300 yds	15"	-15 1/2"	-14 2/3"	-15 1/3"	400 yds	-15 1/2"
4th Line	400 yds	34 8/9"	-34 1/2"	-34 1/5"	-34 "	500 yds	-33 "
5th Line	500 yds	64"	-63 3/5"	-65"	-62 1/9"	600 yds	-60 1/5"

Magnification 10x

		Bullet Drop Inches	Fed 338 Win mag 210 GR Nosler 2830fps	FED 223 69 gr Sierra Matchking 2950 fps	ZERO AT 150 Yards	FED 17 HMR Hornady Vmax 17Gr 2530
Centre Line	100 yds	0"	0"	0"	150 Yards	0 "
2nd Line	200 yds	3 3/4"	-3 3/5"	-3 1/2"	200 Yards	-5 1/5"
3rd Line	300 yds	13 1/2"	-13 2/5"	-13 1/3"	250 Yards	-15 "
4th Line	400 yds	31 2/5"	-30 3/5"	-31 1/9"	300 Yards	-31 1/2"
5th Line	500 yds	57 3/5"	-56 1/2"	-59 5/7"	350 Yards	-55 3/5"

Magnification 11x

		Bullet Drop Inches	FED 7mm-08 140 gr Nosler bal tip 2800 fps	FED 3006 165 Gr Nosler Bal tip 2800 fps
Centre Line	100 yds	0"	0"	0"
2nd Line	200 yds	3 3/7"	-3 3/5"	-3 3/5"
3rd Line	300 yds	12 2/7"	-13"	-13 "
4th Line	400 yds	28 5/9"	-29 2/5"	-29 3/5"
5th Line	500 yds	52 1/3"	-53 2/5"	-53 4/5"

Magnification 12x

		Bullet Drop Inches	FEDERAL 243win 95 gr Nosler Bal tip 3025 fps	FEDERAL 223 55 Gr Nosler Bal tip 3240 fps	FED 260 Rem 120gr Nosler 2950 fps	FED 2506 117Gr Sierra GameKing 3030 fps
Centre Line	100 yds	0"	0"	0"	0"	0"
2nd Line	200 yds	3 1/7"	-3"	-2 4/5"	-3 1/5"	-3"
3rd Line	300 yds	11 1/4"	-11 1/2"	-11"	-12"	-11"
4th Line	400 yds	26 1/6"	-26 1/2"	-26 1/3"	-27 1/5"	-25 3/5"
5th Line	500 yds	48"	-49 1/5"	-51 1/2"	-50 1/9"	-47 2/5"

Magnification 13x

		Bullet Drop Inches	FED 300 WSM 165gr 3120 fps	FED 300 Win Mag 165gr 3050 fps	FEDERAL 270 Win 130 Gr Bal tip 3060 fps	FED 270 WSM 150 Gr Nosler 3100 Fps
Centre Line	100 yds	0"	0"	0"	0 "	0
2nd Line	200 yds	2 8/9"	-2 5/7"	-2 8/9"	-2 8/9"	-2.7
3rd Line	300 yds	10 2/5"	-10 1/3"	-11"	-10 2/3"	-10.1
4th Line	400 yds	24 1/6"	-23 4/5"	-25 1/5"	-24 1/2"	-23.1
5th Line	500 yds	44 2/7"	-44 1/5"	-46 4/5"	-45 2/5"	-42.7

Please note: Parameters such as barrel length, humidity, altitude, heights of mount, bullet weight, velocity etc, can lead to different point of impacts.

LIFETIME WARRANTY

Since 1956 Nikko Stirling has manufactured quality optics for hunters and marksmen throughout the world. Decades of optical know how and engineering innovation combined with practical knowledge of hunting and shooting are evident in todays Nikko Stirling products.


For more details and registration please visit our website:
www.nikkostirling.com



DIAMOND FFP


30+34MM FIRST FOCAL PLANE

SUBTENSIONS: PRR (PRECISION RIFLE RETICLE)

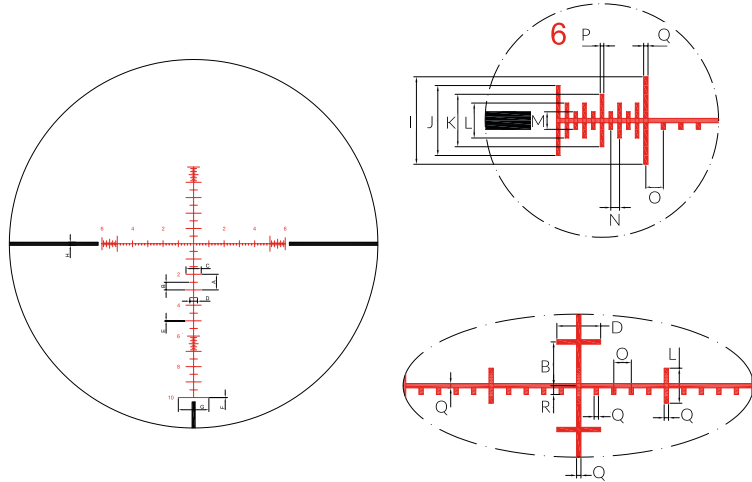

Unit	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
Mils	1	0.5	1	0.5	0.08	0.08	2	0.2	1	0.8	0.6	0.4	0.2	0.1	0.2	0.04	0.05	0.1
cm/100m	10.0	5.0	10.0	5.0	0.8	0.8	20.0	2.0	10.0	8.0	6.0	4.0	2.0	1.0	2.0	0.4	0.5	1.0
in/100yds	3.5	1.8	3.5	1.8	0.3	0.3	7.1	0.7	3.5	2.8	2.1	1.4	0.7	0.4	0.7	0.1	0.2	0.4

SUBTENSIONS: SKELETON HMD (HALF MIL DOT)

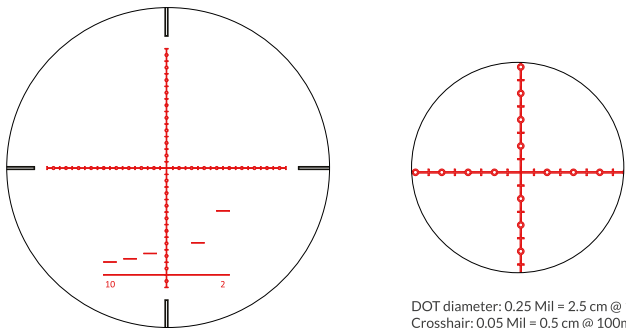


DOT diameter: 0.25 Mil = 2.5 cm @ 100m
Crosshair: 0.05 Mil = 0.5 cm @ 100m

HORNET ED

10-50x60i

SUBTENSIONS: HMD-T RETICLE

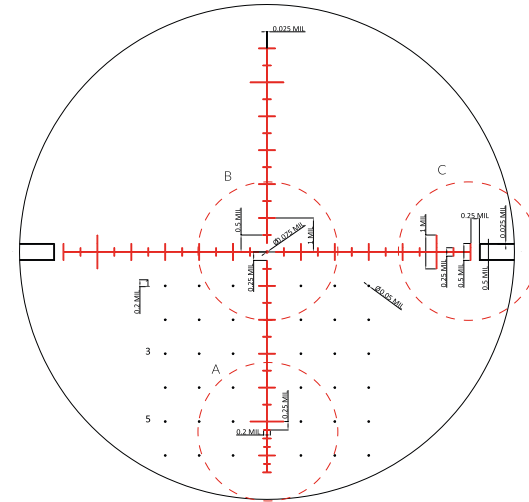

ANNEXURE

SCOPE SPECIFICATIONS

Series	Model	Magnification	Obj. Diameter		Field of View (FOV)				Click Value		Elevation / Windage Adjustment Range (MOA)		Eye Relief				Tube Diameter		Length		Weight		Parallax		Illuminated Reticle		Reticle		Glass/wire Reticle	
			mm	inch	feet at 100 yards		m at 100m		mm at 100m	MOA	Up/Down	Left/Right	mm		inch		1 inch	30mm	mm	inch	grams	oz	yards	m	Yes	No			Glass	Wire
					High power	Low power	High power	Low power					High power	Low power	High power	Low power														
METOR	NSME1424	1 - 4	24	0,94	33,0	133,9	11,0	44,6	15	1/2	100	100	85	85	3,3	3,3		•	259	10,2	525	18,5	100	91	•	•	No 4 dot	•	•	
	NSME251050	2.5 - 10	50	1,97	12,9	52,5	4,3	17,5	7	1/4	70	70	85	85	3,3	3,3		•	316	12,4	550	19,4	100	91	•	•		•	•	
	NSME31256	3 - 12	56	2,20	10,8	43,8	3,6	14,6	7	1/4	60	60	85	85	3,3	3,3		•	338	13,3	680	24,0	100	91	•	•		•	•	
	NSME41650	4 - 16	50	1,97	8,0	32,1	2,7	10,7	7	1/4	50	50	82	87	3,2	3,4		•	352	13,9	630	22,2	150	137	•	•		•	•	
OCTA	NSOC1824	1 - 8	24	0,94	15,9	127,7	5,3	42,6	15	1/2	100	100	90	90	3,5	3,5		•	275	10,8	0,0	0,0	100	91	•	•	Special No.4 Dot	•	•	
	NSOC21650	2 - 16	50	1,97	7,931	63,345	2,6	21,1	7	1/4	80	80	90	90	3,5	3,5		•	352	13,9	0,0	0,0	10 - ∞	9.1 - ∞	•	•		•	•	
	NSOC32456	3 - 24	56	2,20	5	40,4	1,7	13,5	7	1/4	70	70	91	96	3,6	3,8		•	388	15,3	800	28,2	10 - ∞	9.1 - ∞	•	•		•	•	
BOAR EATER	NSBE1424	1 - 4	24	0,94	35,5	144,2	11,8	48,1	15	1/2	100	100	80	80	3,1	3,1		•	257	10,1	0,0	0,0	100	91	•	•	Special No.4 Dot	•	•	
	NSBE1624	1 - 6	24	0,94	18,3	111,2	6,1	37,1	15	1/2	100	100	100	110	3,9	4,3		•	269,1	10,6	472	16,6	100	91	•	•	No 4 dot	•	•	
DIAMOND LR	4-16X50 IR	4 - 16	50	1,97	8,0	32,1	2,7	10,7	7	1/4	60	60	80	80	3,1	3,1		•	349	13,7	784	27,7	10 - ∞	9.1 - ∞	•	•	HF/skeleton HMD	•	•	
	6-24X50 IR	6 - 24	50	1,97	5,4	21,4	1,8	7,1	7	1/4	40	40	80	80	3,1	3,1		•	390	15,4	788	27,8	11 - ∞	10 - ∞	•	•		•	•	
	10-40X56 IR	10 - 40	56	2,20	2,6	10,5	0,9	3,5	3,5	1/8	40	40	95	105	3,7	4,1		•	425	16,7	880	31,0	15 - ∞	13,7 - ∞	•	•		•	•	
HORNET ED	NSNC105060HMDIR	10 - 50	60	2,36	2,3	11,3	0,8	3,8	4,9	0.17(1/20MIL)	45	45	95	95	3,7	3,7		•	458	18,0	980	34,6	10 - ∞	9.1 - ∞	•	•	Hornet reticle	•	•	
DIAMOND SPORTSMAN	NSN105060MD	10 - 50	60	2,36	1,9	9,2	0,6	3,1	3,5	1/8	50	50	90	110	3,5	4,3		•	425	16,7	1060	37,4	10 - ∞	9.1 - ∞	•	•	HMD / Nato	•	•	
DIAMOND HUNTING	NDSI1424	1 - 4	24	0,94	30,2	121,0	10,1	40,3	15	1/2	100	100	75	85	3,0	3,3		•	257	10,1	520	18,3	100	91	•	•	No 4 dot	•	•	
	NDSI15644	1.5 - 6	44	1,73	18,3	73,2	6,1	24,4	15	1/2	80	80	85	100	3,3	3,9		•	297	11,7	567	20,0	100	91	•	•		•	•	
	NDSI3942	3 - 9	42	1,65	12,8	38,4	4,3	12,8	7	1/4	60	60	85	100	3,3	3,9		•	310	12,2	539	19,0	100	91	•	•		•	•	
	NDSI251050	2.5 - 10	50	1,97	9,8	39,4	3,3	13,1	7	1/4	60	60	100	100	3,9	3,9		•	328	12,9	552	19,5	100	91	•	•		•	•	
	NDSI31256	3 - 12	56	2,20	9,2	36,8	3,1	12,3	7	1/4	60	60	90	110	3,5	4,3		•	340	13,4	680	24,0	100	91	•	•		•	•	
	NDSI31242	3 - 12	42	1,65	9,3	36,8	3,1	12,3	7	1/4	60	60	90	90	3,5	3,5		•	329	13,0	506	17,8	100	91	•	•		•	•	
DIAMOND FFP 30	4-16X44	4 - 16	44	1,73	7,3	26,8	2,4	8,9	9,8	0.3375(1/10MIL)	22 MIL	22 MIL	90	90	3,5	3,5		•	340	13,4	620	21,9	10 - ∞	9.1 - ∞	•	•	SKELETON HMD NATO / PRR	•	•	
	6-24X50	6 - 24	50	1,97	4,6	18,8	1,5	6,3	9,8	0.3375(1/10MIL)	15 MIL	15 MIL	90	90	3,5	3,5		•	360	14,2	680	24,0	10 - ∞	9.1 - ∞	•	•	•	•		
DIAMOND FFP 34	4-16X44	4 - 16	44	1,73	7,3	26,8	2,4	8,9	9,8	0.3375(1/10MIL)	35 MIL	35 MIL	90	90	3,5	3,5	34 MM		340	13,4	680	24,0	10 - ∞	9.1 - ∞	•	•	SKELETON HMD NATO / PRR	•	•	
	6-24X50	6 - 24	50	1,97	4,6	18,8	1,5	6,3	9,8	0.3375(1/10MIL)	24 MIL	24 MIL	90	90	3,5	3,5		•	360	14,2	750	26,5	10 - ∞	9.1 - ∞	•	•	•	•		
AIRKING INCL. MOUNT	NGRA2732	2 - 7	32	1,26	12,5	43,8	4,2	14,6	7	1/4	60	60	75	85	3,0	3,3		•	300	11,8	540	19,0	10 - ∞	9.1 - ∞	•	•	HMD	•	•	
	NGRA41242	4 - 12	42	1,65	9,6	28,8	3,2	9,6	7	1/4	60	60	65	75	2,6	3,0		•	336	13,2	671	23,7	10 - ∞	9.1 - ∞	•	•		•	•	
	NGRA432	4	32	1,26	27,8	9,3	7	7	7	1/4	80	80	75	80	3,0	3,0		•	310	12,2	490	17,3	10 - ∞	9.1 - ∞	•	•		•	•	
	NGRA3942	3 - 9	42	1,65	11,9	35,7	4,0	11,9	7	1/4	60	60	75	85	3,0	3,3		•	325	12,8	660	23,3	10 - ∞	9.1 - ∞	•	•		•	•	
	NGRAI2732	2 - 7	32	1,26	12,5	43,8	4,2	14,6	7	1/4	60	60	75	90	3,0	3,5		•	300	11,8	600	21,2	10 - ∞	9.1 - ∞	•	•		•	•	
	NGRAI41242	4 - 12	42	1,65	9,6	28,8	3,2	9,6	7	1/4	60	60	65	75	2,6	3,0		•	336	13,2	730	25,7	10 - ∞	9.1 - ∞	•	•		•	•	
	NGRAI451450	4.5 - 14	50	1,97	6,3	19,6	2,1	6,5	3,5	1/8	60	60	70	80	2,8	3,1		•	370	14,6	766	27,0	10 - ∞	9.1 - ∞	•	•		•	•	
	NGRAI432	4	32	1,26	27,8	9,3	7	7	7	1/4	80	80	75	80	3,0	3,0		•	300	11,8	520	18,3	10 - ∞	9.1 - ∞	•	•		•	•	
NGRAI3942	3 - 9	42	1,65	11,9	35,7	4,0	11,9	7	1/4	60	60	75	85	3,0	3,3		•	325	12,8	690	24,3	10 - ∞	9.1 - ∞	•	•	•	•			
MOUNTMASTER AO INCL. MOUNT	NMM440AO	4	40	1,57	31,1	10,4	7	7	7	1/4	80	80	85	85	3,3	3,3		•	313	12,3	320	11,3	10 - ∞	9.1 - ∞	•	•	HMD	•	•	
	NMM640AO	6	40	1,57	22,0	7,3	7	7	7	1/4	60	60	85	85	3,3	3,3		•	323	12,7	326	11,5	10 - ∞	9.1 - ∞	•	•		•	•	
	NMM432AO	4	32	1,26	29,3	9,8	7	7	7	1/4	80	80	85	85	3,3	3,3		•	285	11,2	281	9,9	10 - ∞	9.1 - ∞	•	•		•	•	
	NMM3932AO	3 - 9	32	1,26	11,9	35,7	4,0	11,9	7	1/4	60	60	85	85	3,3	3,3		•	320	12,6	390	13,8	10 - ∞	9.1 - ∞	•	•		•	•	
	NMM2628AO	2 - 6	28	1,10	12,5	37,5	4,2	12,5	7	1/4	80	80	85	85	3,3	3,3		•	302	11,9	350	12,3	10 - ∞	9.1 - ∞	•	•		•	•	
	NMM3940AO	3 - 9	40	1,57	11,9	35,7	4,0	11,9	7	1/4	60	60	85	85	3,3	3,3		•	322	12,7	380	13,4	10 - ∞	9.1 - ∞	•	•		•	•	
	NMM3950AO	3 - 9	50	1,97	11,9	35,7	4,0	11,9	7	1/4	60	60	75	75	3,0	3,0		•	320	12,6	394	13,9	10 - ∞	9.1 - ∞	•	•		•	•	
NMM41250AO	4 - 12	50	1,97	9,6	28,8	3,2	9,6	7	1/4	60	60	85	85	3,3	3,3		•	333	13,1	403	14,2	10 - ∞	9.1 - ∞	•	•	•	•			

ANNEXURE

SCOPE SPECIFICATIONS


Series	Model	Magnification	Obj. Diameter		Field of View (FOV)				Click Value		Elevation / Windage Adjustment Range (MOA)		Eye Relief				Tube Diameter		Length		Weight		Parallax		Illuminated Reticle		Reticle	Glass/wire Reticle	
			mm	inch	feet at 100 yards		m at 100m		mm at 100m	MOA	Up/Down	Left/Right	mm		inch		1 inch	30mm	mm	inch	grams	oz	yards	m	Yes	No		Glass	Wire
					High power	Low power	High power	Low power					High power	Low power	High power	Low power													
SILVER CROWN	NSC432	4	32	1.26	32.0		10.7	7	1/4	80	80	75		3.0		•		295	11.6	206	7.3	100	91		•		•		
	NSC432C	4	32	1.26	22.0		7.3	7	1/4	80	80	90		3.5		•		245	9.6	365	12.9	100	91		•		•		
	NSC640	6	40	1.57	24.0		8.0	7	1/4	60	60	75		3.0		•		317	12.5	257	9.1	100	91		•		•		
	NSC3940	3 - 9	40	1.57	13.0	39.0	4.3	13.0	7	1/4	60	60	75	75	3.0	3.0	•		311	12.2	271	9.6	100	91		•		•	
	NSC41240	4 - 12	40	1.57	11.0	33.0	3.7	11.0	7	1/4	60	60	75	75	3.0	3.0	•		326	12.8	305	10.8	100	91		•		•	
	NSC420	4	20	0.79	34.0		11.3		7	1/4	60	60	75	75	3.0	3.0	•		270	10.6	115	4.1	100	91		•		•	
	NSC3720	3 - 7	20	0.79	18.0	38.0	6.0	12.7	7	1/4	60	60	75	75	3.0	3.0	•		290	11.4	150	5.3	100	91		•		•	
PANAMAX	3-9X40	3 - 9	40	1.57	14.7	44.1	4.9	14.7	7	1/4	60	60	80	80	3.1	3.1	•		305	12.0	370	13.1	100	91		•		•	
	3-9X40 AO	3 - 9	40	1.57	14.7	44.1	4.9	14.7	7	1/4	60	60	80	80	3.1	3.1	•		310	12.2	470	16.6	10 - ∞	9.1 - ∞		•		•	
	3-9X50	3 - 9	50	1.97	14.7	44.1	4.9	14.7	7	1/4	60	60	80	80	3.1	3.1	•		308	12.1	470	16.6	100	91		•		•	
	3-9X50 AO	3 - 9	50	1.97	14.7	44.1	4.9	14.7	7	1/4	60	60	80	80	3.1	3.1	•		311	12.2	550	19.4	10 - ∞	9.1 - ∞		•		•	
	4-12X50	4 - 12	50	1.97	10.9	32.9	3.6	11.0	7	1/4	60	60	80	80	3.1	3.1	•		318	12.5	555	19.6	100	91		•		•	
	4-12X50 AO	4 - 12	50	1.97	10.9	32.9	3.6	11.0	7	1/4	60	60	80	80	3.1	3.1	•		322	12.7	570	20.1	10 - ∞	9.1 - ∞		•		•	
	4.5-14X50 AO	4.5 - 14	50	1.97	9.7	29.1	3.2	9.7	7	1/4	60	60	80	80	3.1	3.1	•		337	13.2	578	20.4	10 - ∞	9.1 - ∞		•		•	
	6-18X50 AO	6 - 18	50	1.97	7.3	22.0	2.4	7.3	7	1/4	60	60	80	80	3.1	3.1	•		359	14.1	670	23.6	10 - ∞	9.1 - ∞		•		•	
	8-24X50 AO	8 - 24	50	1.97	5.5	16.5	1.8	5.5	7	1/4	60	60	80	80	3.1	3.1	•		370	14.5	680	24.0	10 - ∞	9.1 - ∞		•		•	
	3-9X40 IR	3 - 9	40	1.57	14.7	44.1	4.9	14.7	7	1/4	60	60	80	80	3.1	3.1	•		305	12.0	400	14.1	100	91		•		•	
	3-9X40 AOIR	3 - 9	40	1.57	14.7	44.1	4.9	14.7	7	1/4	60	60	80	80	3.1	3.1	•		310	12.2	500	17.6	10 - ∞	9.1 - ∞		•		•	
	3-9X50 IR	3 - 9	50	1.97	14.7	44.1	4.9	14.7	7	1/4	60	60	80	80	3.1	3.1	•		308	12.1	500	17.6	100	91		•		•	
	3-9X50 AOIR	3 - 9	50	1.97	14.7	44.1	4.9	14.7	7	1/4	60	60	80	80	3.1	3.1	•		311	12.2	580	20.5	10 - ∞	9.1 - ∞		•		•	
	4-12X50 IR	4 - 12	50	1.97	10.9	32.9	3.6	11.0	7	1/4	60	60	80	80	3.1	3.1	•		318	12.5	585	20.6	100	91		•		•	
4-12X50 AOIR	4 - 12	50	1.97	10.9	32.9	3.6	11.0	7	1/4	60	60	80	80	3.1	3.1	•		322	12.7	600	21.2	10 - ∞	9.1 - ∞		•		•		
4.5-14X50 AOIR	4.5 - 14	50	1.97	9.7	29.1	3.2	9.7	7	1/4	60	60	80	80	3.1	3.1	•		337	13.2	608	21.4	10 - ∞	9.1 - ∞		•		•		
PANAMAX LR	6-18X50 AOIR	6 - 18	50	1.97	7.3	22.0	2.4	7.3	7	1/4	60	60	80	80	3.1	3.1	•		359	14.1	670	23.6	10 - ∞	9.1 - ∞		•		•	
	8-24X50 AOIR	8 - 24	50	1.97	5.5	16.5	1.8	5.5	7	1/4	60	60	80	80	3.1	3.1	•		370	14.5	680	24.0	10 - ∞	9.1 - ∞		•		•	
PANAMAX PRECISION	4-12X40 AOIR	4-12	40	1.57	10.9	32.9	3.6	11.0	7	1/4	60	60	80	80	3.1	3.1	•		317.5	12.5	532	18.8	100	91		•		•	
ULTIMAX	UL1-6X24	1 - 6	24	0.94	19.5	117.6	6.5	39.2	15	1/2	120	120	88	88	3.5	3.5		•	277	10.9	473	16.7	100	91		•		NO.4 DOT	•
	UL2.5-10X50	2.5 - 10	50	1.97	11.8	45.6	3.9	15.2	7	1/4	80	80	70	78	2.8	3.1		•	356	14.0	630	22.2	100	91		•		•	
	UL3-12X56	3 - 12	56	2.20	9.8	35.7	3.3	11.9	7	1/4	60	60	75	95	3.0	3.7		•	358	14.1	696	24.6	100	91		•		•	

Model	Magnification	Reticle, size	Manually brightness level steps	Elevation Range		Windage Range		Sight lens (WxH) (mm)	Dimensions (LxWxH) (mm)	Weight (incl. battery) (g)	Weight (without battery) (g)
				cm @ 100m	in @ 100yds	cm @ 100m	in @ 100yds				
Pro T5	1	Red Dot, 4MOA	10 positions	364	130	225	80	26 x 21.5	56.5x29x32.5	43.5	41.5
XT4	1	Red Dot, 4MOA	10 positions	457	163	305	110	24.02 x 15.34	46x27x27	35	33
Pro T4	1	Red Dot, 4MOA	10 positions	364	130	225	80	25.76 x 22.01	51x28x33	40	38
Flash 1x25	1	Red Dot, 3MOA	11 positions	218	78	218	78	∅25	71.5x45x47	-	-
NS433	1	8 Pattern	8 positions	175	63	175	63	30x20	95x51x66.5	212	208
NS533	1	8 Pattern	8 positions	175	63	175	63	40x20	95x56x67	225	221
NDR12233	1	Red Dot	8 positions	175	63	175	63	33x22	81x51x53.5	134	130
NDR30	1	Red Dot	12 positions	175	63	175	63	∅30	97x51x66.5	214	210
NDR40	1	Red Dot	12 positions	175	63	175	63	∅40	97x56x67	230	226
MRSL Reflex Sight	1	Red Dot, 4MOA	11 positions	356	128	356	128	28	70x30	144	140

ANNEXURE

SCOPE SPECIFICATIONS

Series	Model	Dimensions in cm								
		A	B	C	D	E	F	G	H	I
METOR	NSME1424	25,90	16,80	7,50	5,80	9,00	0,00	3,00	4,50	3,00
	NSME251050	31,60	13,90	4,42	5,84	9,00	8,75	5,70	4,50	3,00
	NSME31256	33,80	14,60	5,14	5,84	9,00	10,10	6,40	4,50	3,00
	NSME41650	35,20	15,75	5,68	6,43	9,55	9,90	5,70	4,50	3,00
OCTA	NSOC1824	27,50	17,60	7,70	5,80	9,90	0,00	3,00	4,40	3,00
	NSOC21650	35,20	15,50	5,60	5,80	9,90	9,80	5,70	4,40	3,00
	NSOC32456	38,80	15,50	5,70	5,90	9,70	13,60	6,35	4,55	3,00
BOAR EATER	NSBE1424	25,70	16,40	6,70	6,30	9,30	0,00	3,00	4,70	3,00
	NSBE1624	-	-	-	-	-	-	-	-	-
DIAMOND LR	4-16X50 IR	34,90	15,30	5,55	6,00	9,30	10,30	5,70	4,30	3,00
	6-24X50 IR	39,00	17,40	7,70	6,00	9,30	12,30	5,70	4,30	3,00
	10-40X56 IR	43,00	18,50	8,00	6,20	9,80	14,40	5,60	4,30	3,00
HORNET ED	NSNC105060HMDIR	45,80	18,10	6,76	6,26	10,20	17,50	6,75	4,30	3,00
DIAMOND SPORTSMAN	NSN105060MD	42,42	17,02	7,37	5,33	7,37	18,03	6,86	4,32	3,00
DIAMOND HUNTING	NDSI1424	25,70	16,90	7,45	5,75	8,80	0,00	3,00	4,32	3,00
	NDSI15644	29,84	13,85	4,40	5,75	8,80	7,19	5,10	4,32	3,00
	NDSI3942	31,10	12,50	4,45	4,35	8,50	9,80	4,90	4,32	3,00
	NDSI251050	32,70	14,00	4,55	5,75	8,80	9,90	5,70	4,32	3,00
	NDSI31256	34,05	14,55	5,00	5,75	8,80	10,70	6,40	4,32	3,00
	NDSI31242	32,90	14,30	4,80	5,75	8,80	9,80	4,90	4,32	3,00
	NDSI31262	34,95	14,70	5,20	5,75	8,80	11,40	7,00	4,32	3,00
DIAMOND FFP 30	4-16X44	33,50	15,29	4,48	5,68	9,85	8,30	5,10	4,50	3,40
	6-24X50	35,60	16,73	5,60	5,60	9,20	9,57	5,70	4,50	3,40
DIAMOND FFP 34	4-16X44	33,50	15,29	4,48	5,68	9,85	8,30	5,10	4,50	3,40
	6-24X50	35,60	16,73	5,60	5,60	9,20	9,57	5,70	4,50	3,40
AIRKING INCL. MOUNT	NGRA2732	30,00	12,90	4,45	5,25	9,65	7,45	4,85	4,20	2,54
	NGRA41242	33,60	14,30	5,40	5,65	8,85	10,45	5,85	4,20	2,54
	NGRA432	31,00	14,30	5,60	5,30	8,10	7,90	4,40	3,90	2,54
	NGRA3942	32,50	13,20	4,35	5,60	8,85	10,45	5,85	4,20	2,54
	NGRAI2732	30,00	12,90	4,45	5,25	9,65	7,45	4,85	4,50	2,54
	NGRAI41242	33,60	14,30	5,40	5,65	8,85	10,45	5,85	4,50	2,54
	NGRAI451450	37,00	15,60	6,55	5,85	9,10	12,30	6,25	4,50	2,54
	NGRAI432	30,00	15,35	5,15	7,00	6,70	7,95	4,85	4,50	2,54
	NGRAI3942	32,50	13,20	4,35	5,60	8,85	10,45	5,85	4,50	2,54
MOUNTMASTER AO INCL. MOUNT	NMM440AO	31,30	13,70	5,45	5,40	7,20	10,40	5,36	4,20	2,54
	NMM640AO	32,30	14,70	5,45	6,40	7,20	10,40	5,36	4,20	2,54
	NMM432AO	28,50	13,40	5,10	5,40	7,20	7,90	4,60	4,20	2,54
	NMM3932AO	32,00	15,10	6,80	5,05	8,80	8,10	4,60	4,20	2,54
	NMM2628AO	30,20	12,80	4,60	5,15	9,80	7,60	4,20	4,20	2,54
	NMM3940AO	32,20	13,10	4,80	5,05	8,80	10,30	5,36	4,20	2,54
	NMM3950AO	32,00	12,25	4,05	5,15	8,80	10,95	6,30	4,20	2,54
NMM41250AO	33,30	13,60	5,40	5,15	8,80	10,90	6,30	4,20	2,54	
SILVER CROWN	NSC432	29,50	15,15	6,65	5,65	8,15	6,20	3,92	3,90	2,54
	NSC640	31,70	15,70	7,20	5,65	8,15	7,85	4,70	3,90	2,54
	NSC3940	31,10	14,30	6,60	4,80	8,90	7,90	4,70	3,90	2,54
	NSC41240	32,60	15,80	8,10	4,80	8,90	7,90	4,70	3,90	2,54
ULTIMAX	UL1-6X24	26,90	17,50	9,20	4,80	9,30	0,00	3,00	4,60	3,00
	UL2.5-10X50	37,80	15,90	6,70	5,80	9,30	12,60	5,80	4,60	3,00
	UL3-12X56	37,10	14,90	5,60	5,80	9,30	13,00	6,50	4,60	3,00

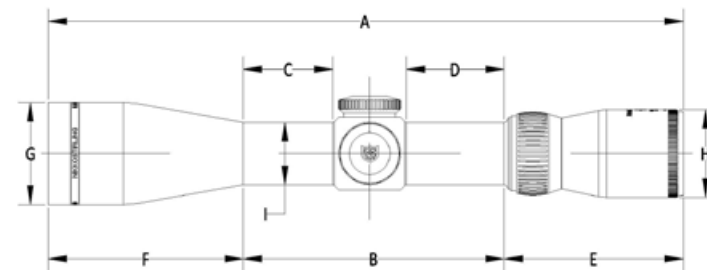

Series	Model	Dimensions in cm								
		A	B	C	D	E	F	G	H	I
PANAMAX	3-9X40	30,40	12,50	4,60	4,60	8,50	9,40	4,70	4,30	2,54
	3-9X40 AO	30,90	12,20	4,30	4,50	8,50	10,20	5,10	4,30	2,54
	3-9X50	30,70	12,20	4,30	4,60	8,50	10,00	5,70	4,30	2,54
	3-9X50 AO	31,00	11,60	3,70	4,50	8,50	10,90	6,10	4,30	2,54
	4-12X50	31,70	12,70	4,80	4,60	8,50	10,50	5,70	4,30	2,54
	4-12X50 AO	32,10	12,70	4,80	4,50	8,50	10,90	6,10	4,30	2,54
	4.5-14X50 AO	33,60	12,70	4,80	4,50	8,50	12,40	6,10	4,30	2,54
	6-18X50 AO	35,80	12,90	5,00	4,50	8,50	14,40	6,10	4,30	2,54
	8-24X50 AO	36,90	14,00	6,10	4,50	8,50	14,40	6,10	4,30	2,54
	3-9X40 IR	30,40	12,50	4,60	4,60	8,50	9,40	4,70	4,30	2,54
	3-9X40 AOIR	30,90	12,20	4,30	4,60	8,50	10,20	5,10	4,30	2,54
	3-9X50 IR	30,70	12,20	4,30	4,60	8,50	10,00	5,70	4,30	2,54
	3-9X50 AOIR	31,00	11,60	3,70	4,50	8,50	10,90	6,10	4,30	2,54
	4-12X50 IR	31,70	12,70	4,80	4,60	8,50	10,50	5,70	4,30	2,54
4-12X50 AOIR	32,10	12,70	4,80	4,50	8,50	10,90	6,10	4,30	2,54	
4.5-14X50 AOIR	33,60	12,70	4,80	4,50	8,50	12,40	6,10	4,30	2,54	
PANAMAX LR	6-18X50 AOIR	35,80	12,90	5,00	4,50	8,50	14,40	6,10	4,30	2,54
	8-24X50 AOIR	36,90	14,00	6,10	4,50	8,50	14,40	6,10	4,30	2,54
PANAMAX PRECISION	4-12X40	32,10	12,70	4,80	4,50	8,50	10,90	4,70	4,30	2,54

LRX RETICLE USER MANUAL

The LRX reticle uses everyday measurements to allow you to quickly and accurately, range find and determine the correct hold over for your ammunition. Simply the hold over lines in this reticle are set at exact inches. The first one is set at 1 inch then 2 inches then 4 inches of hold over.

LRX measurements in inches and yards										
	100	200	300	400	500	600	700	800	900	1000
1st line	1	2	3	4	5	6	7	8	9	10
2nd line	2	4	6	8	10	12	14	16	18	20
3rd line	4	8	12	16	20	24	28	32	36	40
4th line	6	12	18	24	30	36	42	48	54	60
5th line	8	16	24	32	40	48	56	64	72	80
6th line	10	20	30	40	50	60	70	80	90	100

Quick accurate hold over markers - All you need to know is the trajectory or amount of bullet drop of your ammunition. At 100 yards the distance between the centre and the first horizontal bar is 1 inch. The second bar is 2 inches. Then each bar is a further 2 inches at 100 yards. Hold over at other known distances is now easy to calculate. Full instructions and reference charts are supplied with each rifle scope featuring the LRX reticle.

Products and technical data are subject to change without notice.

