

SIGHTRON®

S6 1-6x24 SERIES RIFLESCOPE INSTRUCTIONS

Introduction to Sightron

Congratulations on the purchase of your new Sightron S6 Series Rifle Scope. Sightron is a leader in developing new products for the outdoor enthusiast. This instruction sheet is designed to provide you with the proper fundamentals for using your S6 Series Rifle Scope. If you have any questions, please feel free to contact us at info@sightron.com, www.sightron.com, or by phone at +1-919-562-3000.



Your New S6 Rifle Scope

Before mounting your new Sightron S6 1-6x24 Series Scope please check to make sure it is the correct model and includes the following accessories:

- 1-2.0 MM Allen wrench
- 1-Lens Cloth
- 1-Instruction Sheet
- 1-CR2032 Battery for the illumination Switch
- 1-Reticle Chart (LRT Only)

Mounting your Rifle Scope

CAUTION: ALWAYS ENSURE YOUR WEAPON IS UNLOADED PRIOR TO MOUNTING YOUR SCOPE. USE EYE AND HEARING PROTECTION AND FOLLOW PROPER SAFETY RULES WHEN HANDLING OR FIRING YOUR WEAPON.

Place both rings on your mount base or receiver, and tighten. Remove the top half of the rings and place the rifle scope in the bottom half of the rings. Once you have determined proper ring spacing and eye relief, align the reticle with a vertical line preferably a plumb line. Tighten the top half of the rings to between 15 to 18 inch pounds or 169 to 203 Newton Centimeters and adjust the diopter or eye piece focus so the reticle is crisp and clear. Note: The only purpose of the diopter is to focus the reticle sharp and clear.




Focusing your Rifle Scope

Your new scope has been optically centered at the factory and superior performance will be obtained with minimal adjustment. Prior to sighting in your scope it is important to know the windage and elevation adjustment specifications of your particular scope model. A general rule is the more the magnification the less internal adjustment is available. Once you have completed the eyepiece / diopter adjustment, your scope is adjusted and ready for shooting.

Sighting in Your Gun

1. Place a 2 to 3 foot target at 50 to 100 yards away. Using a bench rest, fire two shots while aiming at the center of the bullseye.
2. While re-aiming at the bullseye adjust the reticle to the bullets impact point by using the turret adjustments and fire two more shots.
3. Your scope should now be close to point of aim. Fire at the bullseye and make the necessary final adjustments.
4. Adjusting the windage and elevation turret in the direction of the arrow on the knob, it will move the bullet impact in the direction indicated.
5. For best optical and mechanical performance keep the windage and elevation travel as centered as possible to allow for maximum adjustment range for your model of rifle scope. Note: Most sight in problems are caused by poor ring alignment.

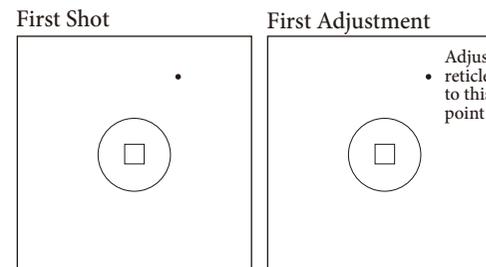

Using your Illuminated Reticle

To install the illumination battery, remove the battery cap located at the Illumination switch by rotating it counterclockwise. Insert the CR2032 battery with the positive side up and retighten finger tight. Rotate the illumination switch to the required setting for the lighting conditions.



Resetting your Windage and Elevation Turrets

Once your scope is sighted in for the required distance loosen the 2.0 MM hex screw. Remove the turret and re-install so the zero aligns with vertical index mark on the scale under the turret. Retighten to 4 inch pound or 45 N-CM. Note: The turret is splined and must be removed to reset the turret to zero.



Maintaining Your Scope Lenses

Sightron Rifle scope lenses are Fully Multi-Coated and are engineered for a lifetime of performance. Lenses should be cleaned regularly to ensure optimal performance during the life of the rifle scope.

By using a lens cleaning kit, first brush all loose dust and dirt particles with a lens brush.

Using a camera lens grade cleaner and lens cloth carefully clean the lenses.

Adjustment Dials

All Sightron S6 series rifle scopes external adjustments operate in a sealed system that requires no additional maintenance or lubrication.

Sightron rifle scopes use the latest technology that ensures all S6 series rifle scopes are 100% waterproof.

Rifle Scope Exterior

All Sightron rifle scope models are made from high quality aircraft aluminum.

The hard coated anodizing allows the shooter worry free maintenance for a lifetime of enjoyment.

To clean the main body tube, simply wipe off any dirt particles using a moist clean cloth (use water only).

Troubleshooting Tips

Please check the following items before returning your rifle scope for warranty repair.

1. Check the elevation and windage travel to make sure that it is not past the allotted specification for the model rifle scope.
2. Make sure the rings are torqued to the required specification provided by Sightron.
3. Check the diopter setting to make sure that it is properly adjusted for your eye.
4. Please contact a Sightron technical specialist for all other questions concerning your model rifle scope.



SIGHTRON USA LIMITED LIFETIME WARRANTY

Sightron is certain our rifle scopes, binoculars and spotting scopes will line up to your high expectations and never let you down.

The Sightron "Limited Lifetime USA Warranty" covers all Sightron products sold and shipped within the 50 States of the United States. Should your Sightron product ever fail due to workmanship or materials simply return it to Sightron and we will repair or replace it at our option. "See Exclusion Below"

This warranty does not cover damage that occurs in shipment or failures that result from accidents, misuse, abuse, unauthorized alterations, theft, modifications or acts of God.

Note: Products shipped from the USA out of the Country are considered gray market products and are not covered by this warranty.

Please return your Sightron product to: Sightron, Inc. 100 Jeffrey Way, Suite A, Youngsville, NC 27596. Include a detailed letter with the issues you are experiencing along with return address and complete contact information.

If you have any questions please contact us at: 1-919-562-3000 or at info@sightron.com

*Sightron Warranty Exclusion:
Sightron Electronic Components Warranty-Two Years*



SIGHTRON INTERNATIONAL WARRANTY

Sightron is certain our rifle scopes, binoculars and spotting scopes will line up to your high expectations and never let you down.

The Sightron "Limited Lifetime International Warranty" covers all Sightron products sold outside the 50 States of the United States. "See Exclusion below".

This warranty does not cover damage that occurs in shipment or failures that result from accidents, misuse, abuse, unauthorized alterations, theft, modifications or acts of God.

Should your Sightron product ever fail due to workmanship or materials simply return it to the Sightron distributor from the country it was purchased along with a copy of the sales receipt and we will repair or replace it at our option. If you are not sure of the distributor for your country or region please email us at info@sightron.com or contact us in the U.S.A. +1-919-562-3000.

Due to the changing requirements by the U.S. Department of Commerce it is important to let your distributor return your scope for repair as they are aware of the proper importation and exportation regulations for your country. Scopes sent directly to Sightron U.S.A. from outside the U.S.A. will not be accepted unless a prior RMA is authorized.

*Sightron Warranty Exclusion:
Sightron Electronic Components Warranty-Two Years*

SIGHTRON, INC.
100 Jeffrey Way, Suite A Youngsville,
NC 27596, USA
TEL : +1-919-562-3000
+1-800-867-7512
FAX : +1-919-562-7129